




The first wireable IP65 Outdoor lighting system.

Create your own water, rain and storm resistant lighting solution.



Patented Solution

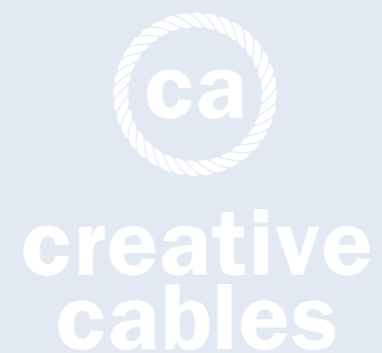

Water has never been a natural environment for light.
Until today.

EIVA SYSTEM


IP65: Water and rain resistant

The heart of EIVA is the world's first wired E27 IP65 lamp holder: thanks to the insulating gel inside and a watertight membrane on the bulb, this lamp holder withstands rain and storms in complete safety.



Designed for outdoor, perfect for indoor.

The EIVA lighting system is designed, engineered and patented by Creative-Cables to allow you to illuminate outdoor spaces like gardens, patios and terraces but is also an excellent solution for bathrooms, SPAs, and other indoor areas exposed to humidity.

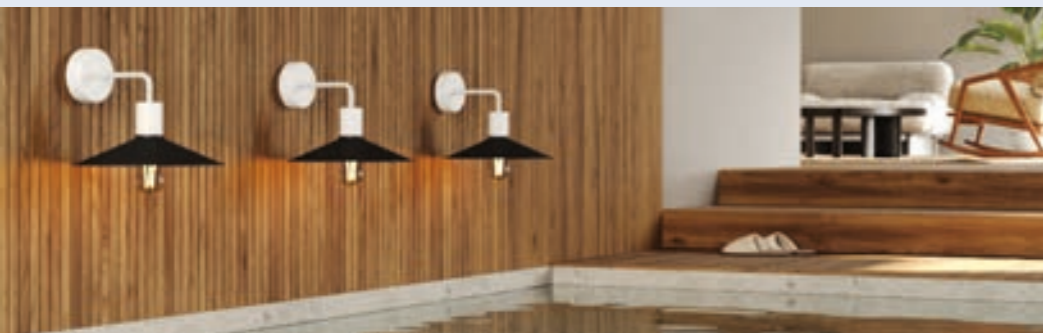

EIVA COMPONENTS


Lampholders

Configure your EIVA system by choosing the components that best suit your needs. IP65 single entry lamp holders can be purchased naked or with a soft touch silicone cover: perfect for single pendants or wall lamps.



Multiple input components

The multiple entry IP65 components (Eiva 2 and Eiva T) allow to create solutions with several light sources, distributed over a wide range and connected by an EIVA cable.

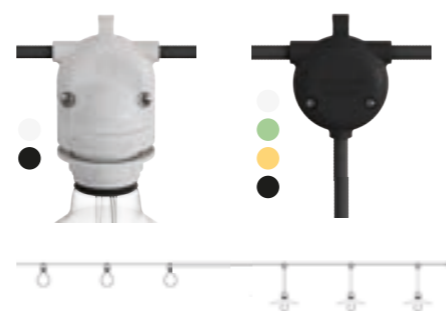

Ceiling roses and plugs

The IP65 soft-touch silicone ceiling rose and the IP44 plug will allow you to complete your lighting using a wall/ceiling connection or a socket.



OUTDOOR EIVA CABLES

Fabric Cables









Designed for the EIVA waterproof lighting system, all of our fabric cables are made in Italy.

Specifications:

H05RN-F 300/500VAC 2x1mm²
Rubber sheathed flexible round IMQ-HAR Cable DOUBLE INSULATION under textile braid.
Standard reference: EN 50525-2-11, Low Voltage European Directive No. 2014/35/EU.

The cable is sold by the meter, multiple orders will be delivered in one piece up to a maximum of 50 meters in length.

MADE IN ITALY

 SM01 2 X 1,00 XZ2SM01	 SM04 2 X 1,00 XZ2SM04	 SM09 2 X 1,00 XZ2SM09	 SN04 2 X 1,00 XZ2SN04
 SN02 2 X 1,00 XZ2SN02	 SN06 2 X 1,00 XZ2SN06	 SX08 2 X 1,00 XZ2SX08	 SZ11 2 X 1,00 XZ2SZ11

What does UV resistant cable mean?

It means the fabric used to line these cables was designed to resist UV rays, which make up around 10% of sunlight. The colour of UV resistant cables remains vibrant and doesn't tend to fade over time, even when they are consistently exposed to sunlight.




EIVA LAMPSHADES



- EKPSBIAN
- EKPSCEBI
- EKPSRUBI
- EKPSNERA

E27, L 305mm, H 140mm

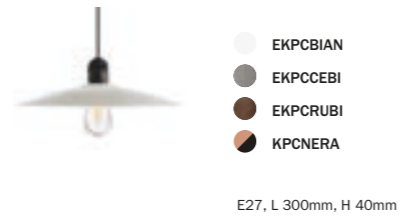

- EKPCBIAN
- EKPCCEBI
- EKPCRUBI
- KPCNERA

E27, L 300mm, H 40mm




- DD24BIA
- DD24NER
- DD24BLULBLUS
- DD24ROSLROSS
- DD24VERGIA

L 240mm, H 3mm



- DD24NER
- DD24BLULBLUS
- DD24ROSLROSS
- DD24VERGIA

L 400mm, H 3mm

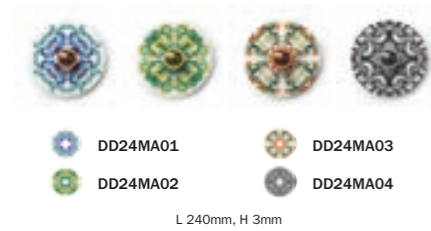

- KPAM09VBL
- KPAM09VNL
- KPAM09SB
- KPAM09PE
- KPAM09VVL
- KPAM09VE
- KPAM09MU



L 380mm, H 200mm

EIVA LAMPS

With EIVA lamps you can finally change the look of your outdoor spaces with the safety of a water resistant product which is Made in Italy. The soft touch silicone finishes and matching cable are perfect to re-create an elegant and contemporary design in your outdoor spaces, lighting pergolas and gazebos. Choose among the available versions the one that best suits your needs: with lampshade, for exposed light bulb, suspended, plug-in or wall fixed and enjoy your outdoor spaces!




- APE2TBSNEPER

ADJUSTABLE
Tilted up to 90° & rotated by 315°
L 195mm, H 255mm



- APE2TBSBI02
- APE2TBSNE02

ADJUSTABLE
Tilted up to 90° & rotated by 315°
Max L 205mm, Max H 255mm

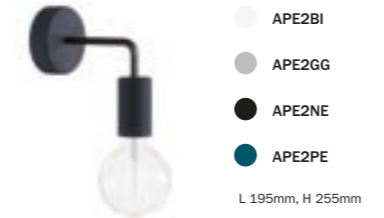

- APE2BI
- APE2GG
- APE2NE
- APE2PE

L 195mm, H 255mm



- APE2BI02
- APE2NE02

L 195mm, H 255mm




- APE2NEPER

L 195mm, H 255mm




- APE2NEPAM13VNL
- APE2NEPAM13VNL

L 390mm, H 260mm

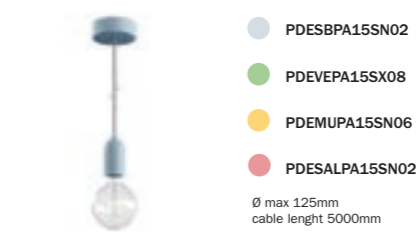


- PDESBPA15SN02
- PDEVEPA15SX08
- PDEMUPA15SN06
- PDESALPA15SN02

Ø max 125mm
cable length 5000mm

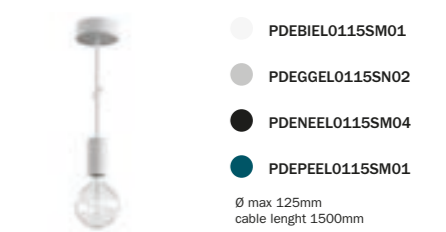

- PDEBIELO115SM01
- PDEGGELO115SN02
- PDENEEL0115SM04
- PDEPEELO115SM01

Ø max 125mm
cable length 1500mm

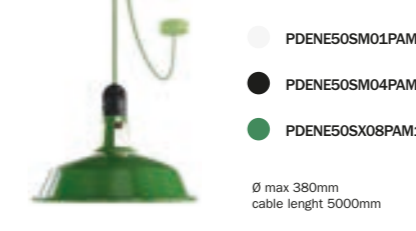

- PDENE50SM01PAM11VBL
- PDENE50SM04PAM11VNL
- PDENE50SX08PAM11VVL

Ø max 380mm
cable length 5000mm




- PDEBIELO250SM01DDBIA
- PDENEEL0250SM04DDNER
- PDENEEL0250SM04DDRASOTS

Ø max 40mm
cable length 5000mm



- PSENE50M04

Ø max 60mm
cable length 5000mm

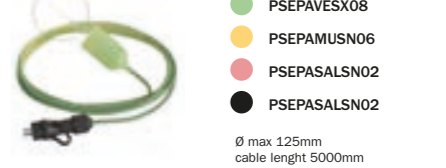

- PSEPASBSN02
- PSEPAVESX08
- PSEPAMUSN06
- PSEPASALSNO2
- PSEPASALSNO2

Ø max 125mm
cable length 5000mm



- PSEEL01BISM01
- PSEEL01GGSN02
- PSEEL01NESM04
- PSEEL01PESM01

Ø max 125mm
cable length 5000mm





- PSEEL02BISM01DD24MA01
- PSEENESX08DD24MA02
- PSEENESM09DD24MA03
- PSEEL02NESM04DD24MA04

Ø max 240mm
cable length 5000mm



USE CASE "A"

String light, three pendants, naked bulb.

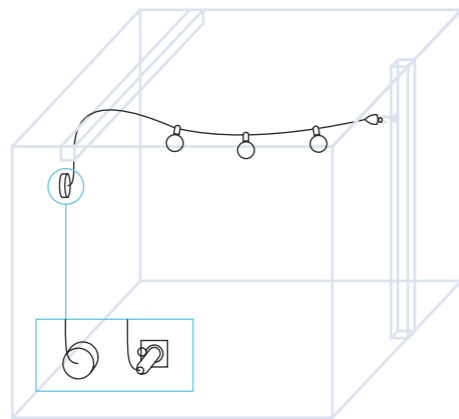

USE CASE "B"

Three pendants with lampshades, two knots.

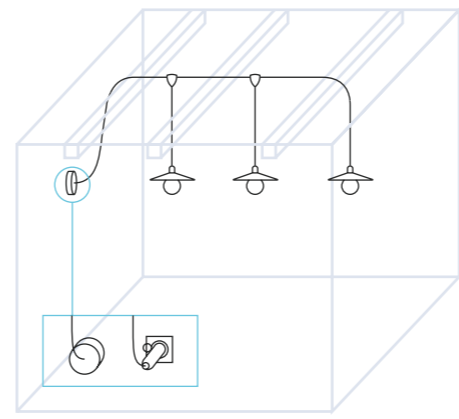

OTHER USE CASES

